


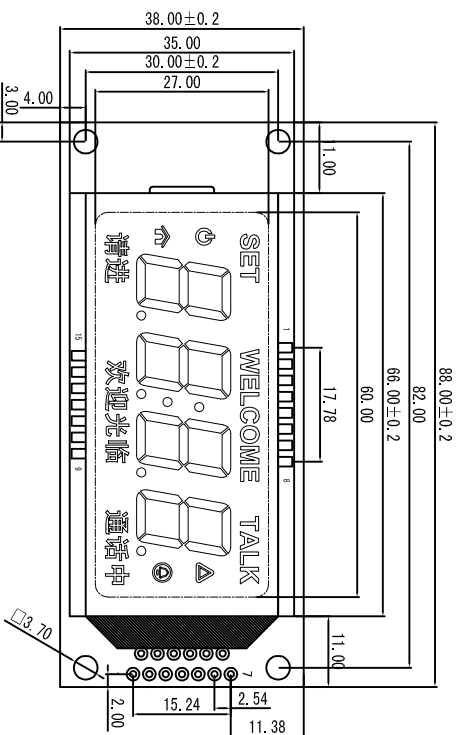


# SCM033B



Pin	Symbol
1	VDD
2	VSS
3	DATA
4	WR
5	CS
6	A
7	K

	S1	S2	S3	S4	S5	S6	S7	S8	S9	S10	S11
COM1	4A	4F	3A	3F	2A	2F	1A	1F	S1	S2	S3
COM2	4B	4G	3B	3G	2B	2G	1B	1G	S4	P5	S6
COM3	4C	4E	3C	3E	2C	2E	1C	1E	S5	S9	S7
COM4	P4	4D	P3	3D	P2	2D	P1	1D	S8		S10

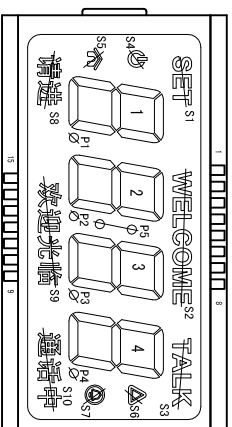

## PERFORMANCE FEATURES

LC FLUID:	VA/NEGATIVE
SUPPLY VOLTAGE:	VDD=5.0V
POLARIZER:	TRANSMISSIVE
VIEWING ANGLE:	6:00
BACK LIGHT:	LED_G
TEMPERATURE RANGE:	-20° C TO 70° C

DRAWN BY:	DOC: SCM033B	SCALE:	UNIT: mm
CHECKED BY:	DWG NO: SCM033B	DATE: 2011.02.11	SHEET NO: 1 of 1
APPROVED BY:			
CONTROLLED BY:			